
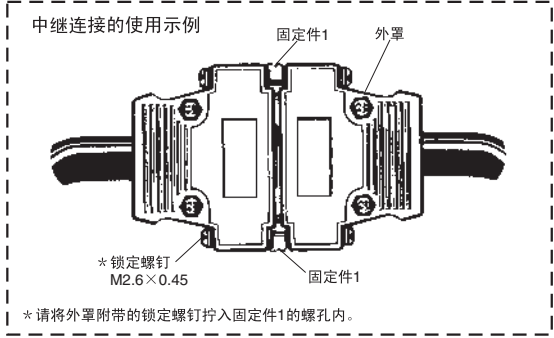


## ■组合示例

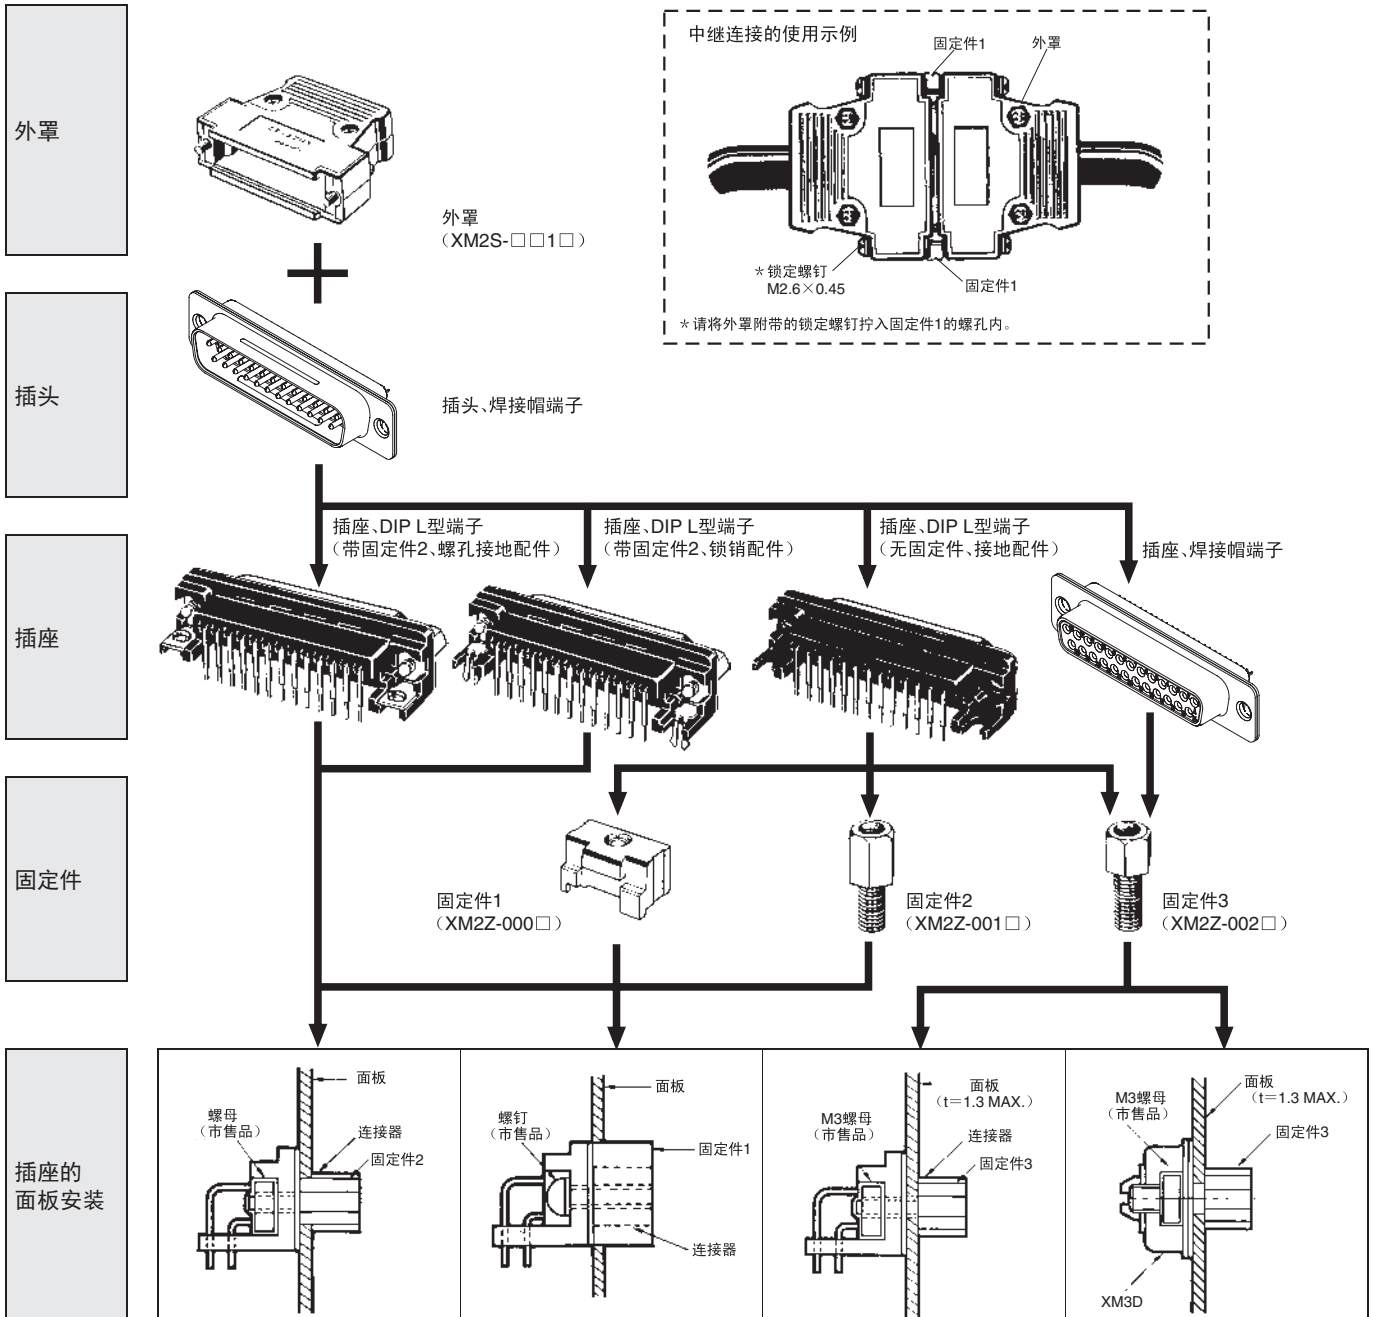

XC5

面板安装方法	不固定在面板上时		固定在面板上时																																			
	固定件2	固定件1	固定件3或M3螺钉																																			
使用固定件	固定件2	固定件1	固定件3或M3螺钉																																			
面板加工尺寸	<table border="1"> <thead> <tr> <th>极数</th> <th>A (mm)</th> </tr> </thead> <tbody> <tr><td>9</td><td>31.0</td></tr> <tr><td>15</td><td>39.4</td></tr> <tr><td>25</td><td>53.3</td></tr> <tr><td>37</td><td>69.6</td></tr> </tbody> </table>	极数	A (mm)	9	31.0	15	39.4	25	53.3	37	69.6	<table border="1"> <thead> <tr> <th>极数</th> <th>A (mm)</th> </tr> </thead> <tbody> <tr><td>9</td><td>34.1</td></tr> <tr><td>15</td><td>42.4</td></tr> <tr><td>25</td><td>56.1</td></tr> <tr><td>37</td><td>72.6</td></tr> </tbody> </table>	极数	A (mm)	9	34.1	15	42.4	25	56.1	37	72.6	<table border="1"> <thead> <tr> <th>极数</th> <th>A (mm)</th> <th>B (mm)</th> </tr> </thead> <tbody> <tr><td>9</td><td>24.99</td><td>20.5</td></tr> <tr><td>15</td><td>33.32</td><td>28.8</td></tr> <tr><td>25</td><td>47.04</td><td>42.5</td></tr> <tr><td>37</td><td>63.50</td><td>59.1</td></tr> </tbody> </table>	极数	A (mm)	B (mm)	9	24.99	20.5	15	33.32	28.8	25	47.04	42.5	37	63.50	59.1
	极数	A (mm)																																				
9	31.0																																					
15	39.4																																					
25	53.3																																					
37	69.6																																					
极数	A (mm)																																					
9	34.1																																					
15	42.4																																					
25	56.1																																					
37	72.6																																					
极数	A (mm)	B (mm)																																				
9	24.99	20.5																																				
15	33.32	28.8																																				
25	47.04	42.5																																				
37	63.50	59.1																																				

注1. 1个连接器需要2个固定件。  
 注2. 适用面板厚度为1.3mm以下。

不同连接器的六角固定件的组合（后装时）

种类	型号	无面板嵌入	有面板嵌入	市售螺母
DIP L型插座	XM3B-□□22	XM2Z-001□	XM2Z-002□	需要
	XM3B-□□22-501□			无需
	XM3B-□□22-502			
DIP L型插头	XM3C-□□22	XM2Z-001□	XM2Z-002□	需要
	XM3C-□□22-501			无需
	XM3C-□□22-502			
DIP直型插座	XM3F-□□20	XM2Z-001□	XM2Z-002□	需要

订购前请务必阅读我司网站上的“注意事项”。

## 欧姆龙电子部品(中国)统辖集团

网站

欧姆龙电子部品贸易(上海)有限公司

<https://www.ecb.omron.com.cn>

Cat. No. **CDLJ-809-CN-01** 2020年2月

© OMRON Corporation 2020 All Rights Reserved.  
规格等随时可能更改,恕不另行通知。